

# QUINT-DIODE/40

Order No.: 2938963



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2938963>

Redundancy module QUINT-DIODE/40



Commercial data	
EAN	4017918929534
Pack	1 pcs.
Customs tariff	85044081
Weight/Piece	0.6836 KG
Catalog page information	Page 596 (IF-2009)

#### Product notes

WEEE/RoHS-compliant since:  
07/10/2006



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

## Technical data

General data	
Width	62 mm
Height	84 mm
Depth	102 mm

Ambient temperature (operation)	-25 °C ... 70 °C (> 60 °C derating, Ex -25 to +60°C)
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Degree of protection	IP20
Class of protection	II (in an enclosed control cabinet)
Efficiency	> 97 %
Mounting position	Horizontal and vertical DIN rail NS 35, EN 60715
Assembly instructions	Can be aligned: Horizontal 2 cm, vertical 5 cm
Electromagnetic compatibility	Conformance with EMC directive 2004/108/EC
Immunity to interference	EN 61000-6-2:2005
Emitted interference	EN 55011
Conformity with EN 50 021	EX II 3G EEx nA IIC T4, KEMA 03 ATEX 1197X

### Certificates / Approvals



Certification


ABS, CUL, CUL Listed, DNV, UL, UL Listed

Certification Ex:

CUL-EX LIS, KEMA-EX, PxC-EX, UL-EX LIS

### Drawings

Block diagram

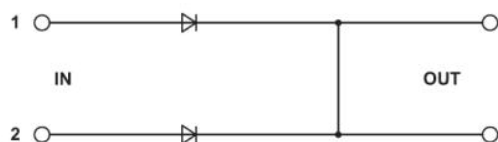

**Address**

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 00  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2009 Phoenix Contact  
Technical modifications reserved;