TP-LINK[®]

150Mbps Wireless N Nano USB Adapter TL-WN725N

• Features:

- Wireless N speed up to 150Mbps
- Seamlessly compatible with 802.11b/g/n products
- 14-language utility and auto run CD
- Supports software-based WPS
- Supports Soft AP function for Wireless Internet Sharing
- Advanced Security: Supports WEP, WPA/WPA2, WPA-PSK/WPA2-PSK
- Supports Windows XP 32/64bit, Vista 32/64bit, Windows 7 32/64bit, Windows 8 32/64bit
- Supports WMM (Wi-Fi Multimedia) Standard for better streaming of real-time data such as video and music
- · Supports ad-hoc and infrastructure modes



• Description:

TP-LINK's 150Mbps wireless N Nano USB adapter, TL-WN725N allows users to connect a desktop or notebook computer to a wireless network at 150Mbps. This miniature adapter is designed to be as convenient as possible and once connected to a computer's USB port, can be left there, whether traveling or at home. It also features advanced wireless encryption and easy installation.


www.tp-link.com

ns are subject to change without notice. IP-LINK is a registered trademark of IP-LINK fechnologies Co., Ltd. C or registered trademarks of their respective holders. No part of the specifications may be reproduced in any fo ve such as translation, transformation, or adaptation without permission from TP-LINK Technologies Co., Ltd.

• Specifications:

HARDWARE FEATURES	
Interface	USB 2.0
LED	Status
Dimensions (W X D X H)	0.73 x 0.59 x 0.28 in. (18.6 x 15 x 7.1mm)
Weight	0.07 ounces / 2.1 grams (Without packaging)
Antenna	Internal
WIRELESS FEATURES	
Wireless Standards	IEEE 802.11b, IEEE 802.11g, IEEE 802.11n
Frequency	2.4-2.4835GHz
Signal Rate	11b: Up to 11Mbps (dynamic)
	11g: Up to 54Mbps (dynamic)
	11n: Up to 150Mbps (dynamic)
EIRP	<20dBm
Reception Sensitivity	130M: -68dBm@10% PER
	108M: -68dBm@10% PER
	54M: -68dBm@10% PER
	11M:-85dBm@8% PER
	6M: -88dBm@10% PER
	1M: -90dBm@8% PER
Wireless Modes	Ad-Hoc / Infrastructure mode
Wireless Security	Supports 64/128 WEP, WPA/WPA2, WPA-PSK/WPA2-PSK (TKIP/AES),
·	Supports IEEE 802.1X
Modulation Technology	DBPSK, DQPSK, CCK, OFDM, 16-QAM, 64-QAM
OTHERS	
Certifications	CE, FCC, IC, RoHS
System Requirements	Windows 8(32/64bits), Windows 7(32/64bits),
Environment	Windows Vista(32/64bits), Windows XP(32/64bits)
	Operating Temperature: $0^{\circ}C \sim 40^{\circ}C$ (32°F $\sim 104^{\circ}F$)
	Storage Temperature: -40° C ~70° C (-40° F ~158° F)
	Operating Humidity: 10%~90% non-condensing
	Storage Humidity: 5%~90% non-condensing

• Diagram:

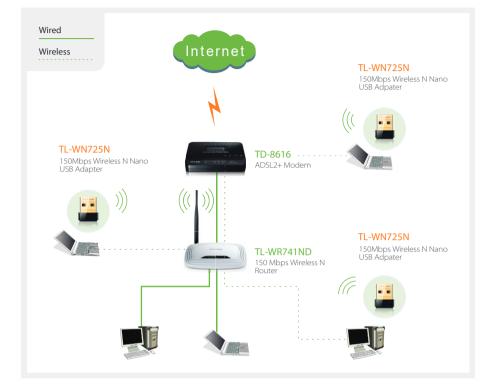

Package:

- 150Mbps Wireless N Nano Adapter TL-WN725N
- Resource CD
- Quick Installation Guide

Related Products:

- 150Mbps Wireless N Router TL-WR741ND/TL-WR740N
- ADSL2+ Modem TD-8616

Specifications are subject to change without notice. TP-LINK is a registered trademark of TP-LINK Technologies Co., Ltd. Other brands and product names are trademarks or registered trademarks of their respective holders. No part of the specifications may be reproduced in any form or by any means or used to make any derivative such as translation, transformation, or adaptation without permission from TP-LINK Technologies Co., Ltd.

www.tp-link.com